

# GE-ABS50-10X-20


Dimensioni 140x90 mm H=60  
Attacco guida Din, IP40



Pulse	50A Duty 1/10
T On Max	10% average 200ms
Freq. Max input	0,005ms
Power supp.	24Vdc - 10A min
Input Start	24V -10mA min

**Reset Alarm Red Turn-off ABS**

Run (GREEN)	Alarm (RED)	Over.C (YELLOW)
○ No Input OFF	○ OK OFF	○ OK OFF
○ ● Work BLINK	● Error ON over freq.	● Error start ON out overcurrent

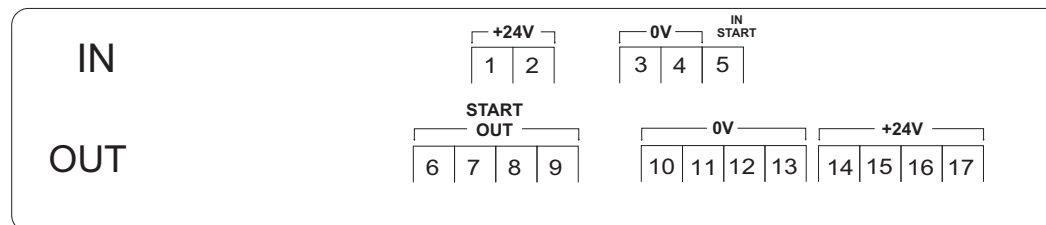

Descrizione	GE-ABS50-10X-20		Cliente
Disegnatore	Munari Mauro	Revisore	Codice Cliente
			Data 26/09/2017
			Revisione 01/17